


RECOMMENDED PANEL CUTOUT DIMENSIONS (FRONT MOUNT)

Unless otherwise specified tolerance:

X.	±0.50	X.°	±3°
.X	±0.38	.X°	±2°
.XX	±0.25		

Performance characteristics:

- Main body part material
Insulator: see spec list
- Contact terminal: Copper alloy, 1.27 μm min Ni under plated, outer Contact plating Au 0.38 μm
Crust: SPCC; front shell plating Ni, back shell plating Sn
Screw: Stainless steel
- Electrical requirements:
Current rating: 3 A
Voltage rating: 300 V
Contact resistance: ≤15 mΩ
Insulation resistance: ≥5000 MΩ
Withstanding voltage: 1000 Vr.m.s, 1mA, 60s
- Mechanical requirements
Insertion force: ≤3.3 N/pin
Extraction force: ≥0.3 N/pin
- Environment specification
Working temperature: -40°C~+105°C
- Applicable standard: IEC60807
- Packing & storing
Method of packing: Tray, inner box, outer box
Storing condition: temperature of -10°C~+40°C below 80% relative humidity
- Style of installation: Panel mounting.
- To prevent the pollution of the environment product info
RoHS agreement: In line with the european union RoHS

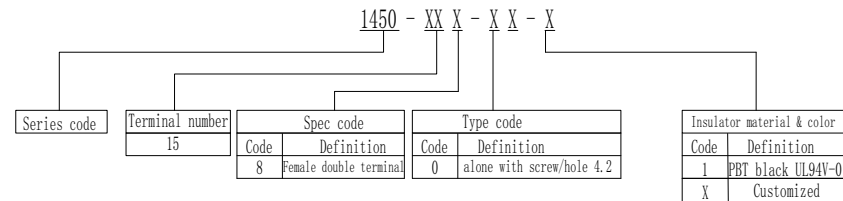


①	1	410061	xudongbin	2019.08.31
②	1	184685	xudongbin	2017.01.21
③	5	111074	MH HAUNG	2016.04.29
Mark	NO.	File NO.	Signature	Date
DRAW			Mh huang	2015.10.21
CHK			Lawrence	2019.12.09
MAN				
STD			Juanli lai	2019.12.12
APP			Alan	2019.12.12

1450 QDB15 female

1450-158-04-1

SLO. 1450. 002

Projection Rev. Weight Scale



All Dimensions in mm Sheet 1 of 1

