





PCB LAYOUT (PCB Thickness 2.0mm MIN)

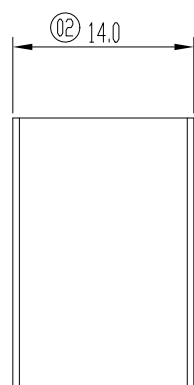

DC(年份/周数)

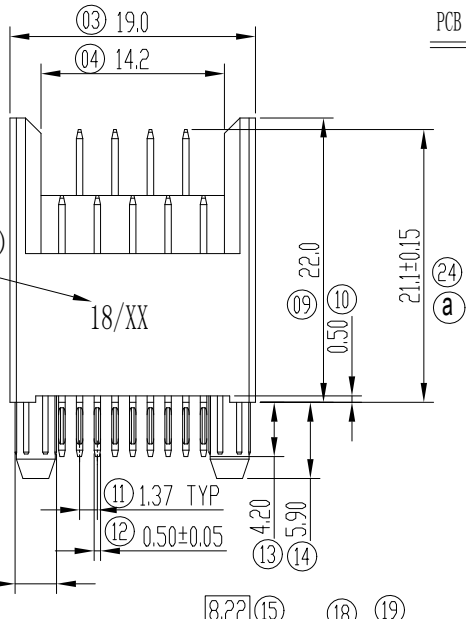

18/XX

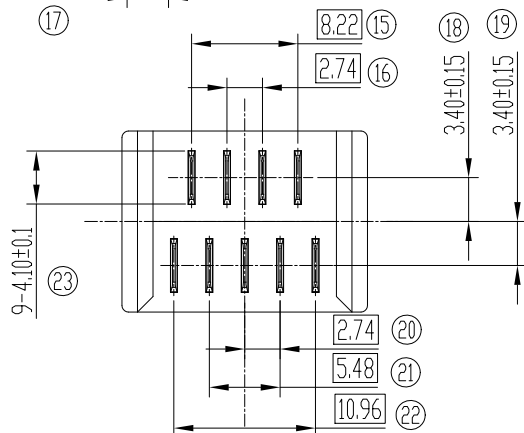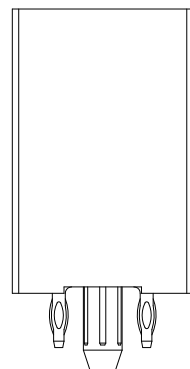

Unless otherwise specified tolerance:

X.	±0.50	X.°	±3°
.X	±0.38	.X°	±2°
.XX	±0.25		

Performance characteristics:

- Main body part material
Insulator: PBT BLACK UL94 V-0
Contact terminal: Copper alloy, 1.27 μm min Ni under plated, outer plating see spec list

2. Electrical requirements:

- Current rating: 3 A
- Voltage rating: 12 V
- Contact resistance: ≤15 mΩ
- Insulation resistance: ≥5000 MΩ
- Withstanding voltage: 1000 Vr.m.s, 1mA, 60s

3. Environment specification

- Working temperature: -40°C ~ +125°C


4. Applicable standard: IEC60807

5. Packing & storing

- Method of packing: Tray, inner box, outer box
- Storing condition: temperature of -10°C ~ +40°C below 80% relative humidity

6. Style of installation: PRESS-FIT installation

7. To prevent the pollution of the environment product info
RoHS agreement: In line with the european union RoHS

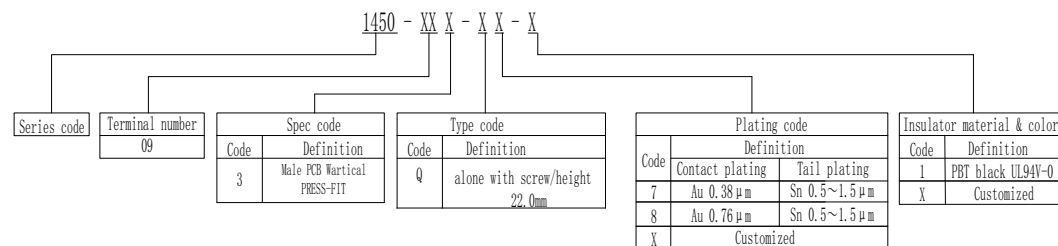

①	1	327914	xudongbin	2018.08.09
Mark	NO.	File NO.	Signature	Date
DRAW	XUDONGBIN 2017.10.25			
CHK	Lawrence2018.8.17			
MAN				
STD	Spring2018.8.17			
APP	Alan2018.8.17			

1450 QDB09 Male
PCB Vertical PRESS-FIT

SL0. 1450. 003

Projection	Rev.	Weight	Scale
⊕	A1		
All Dimensions in mm		Sheet 1 of 1	
SHINNING SHENZHEN SHINNING ELECTRONIC CO. LTD.			

1450-093-QX-1