
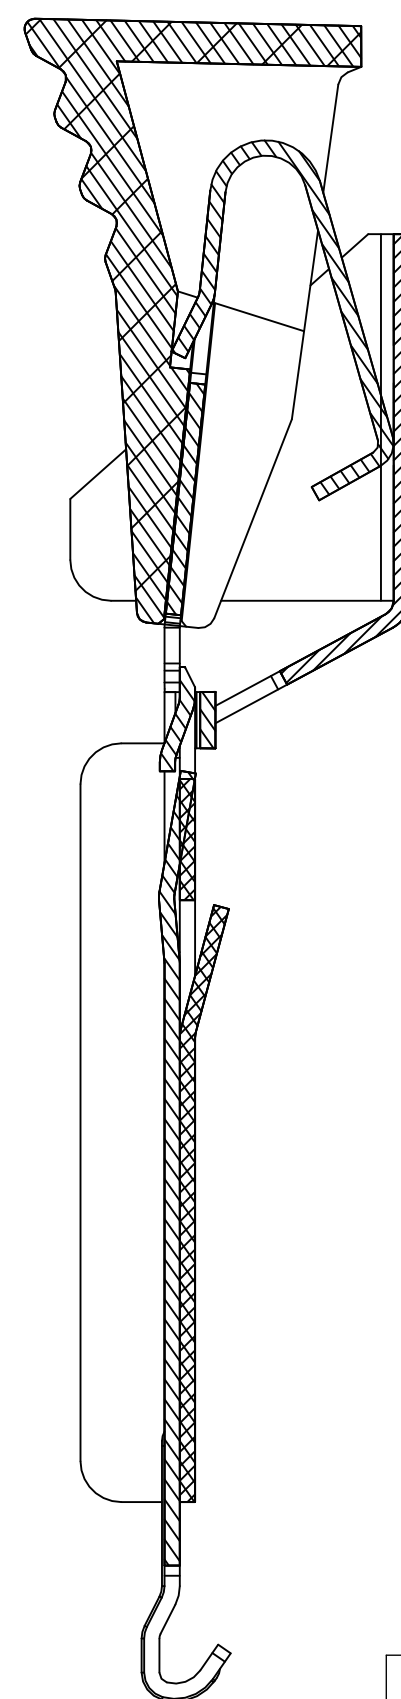
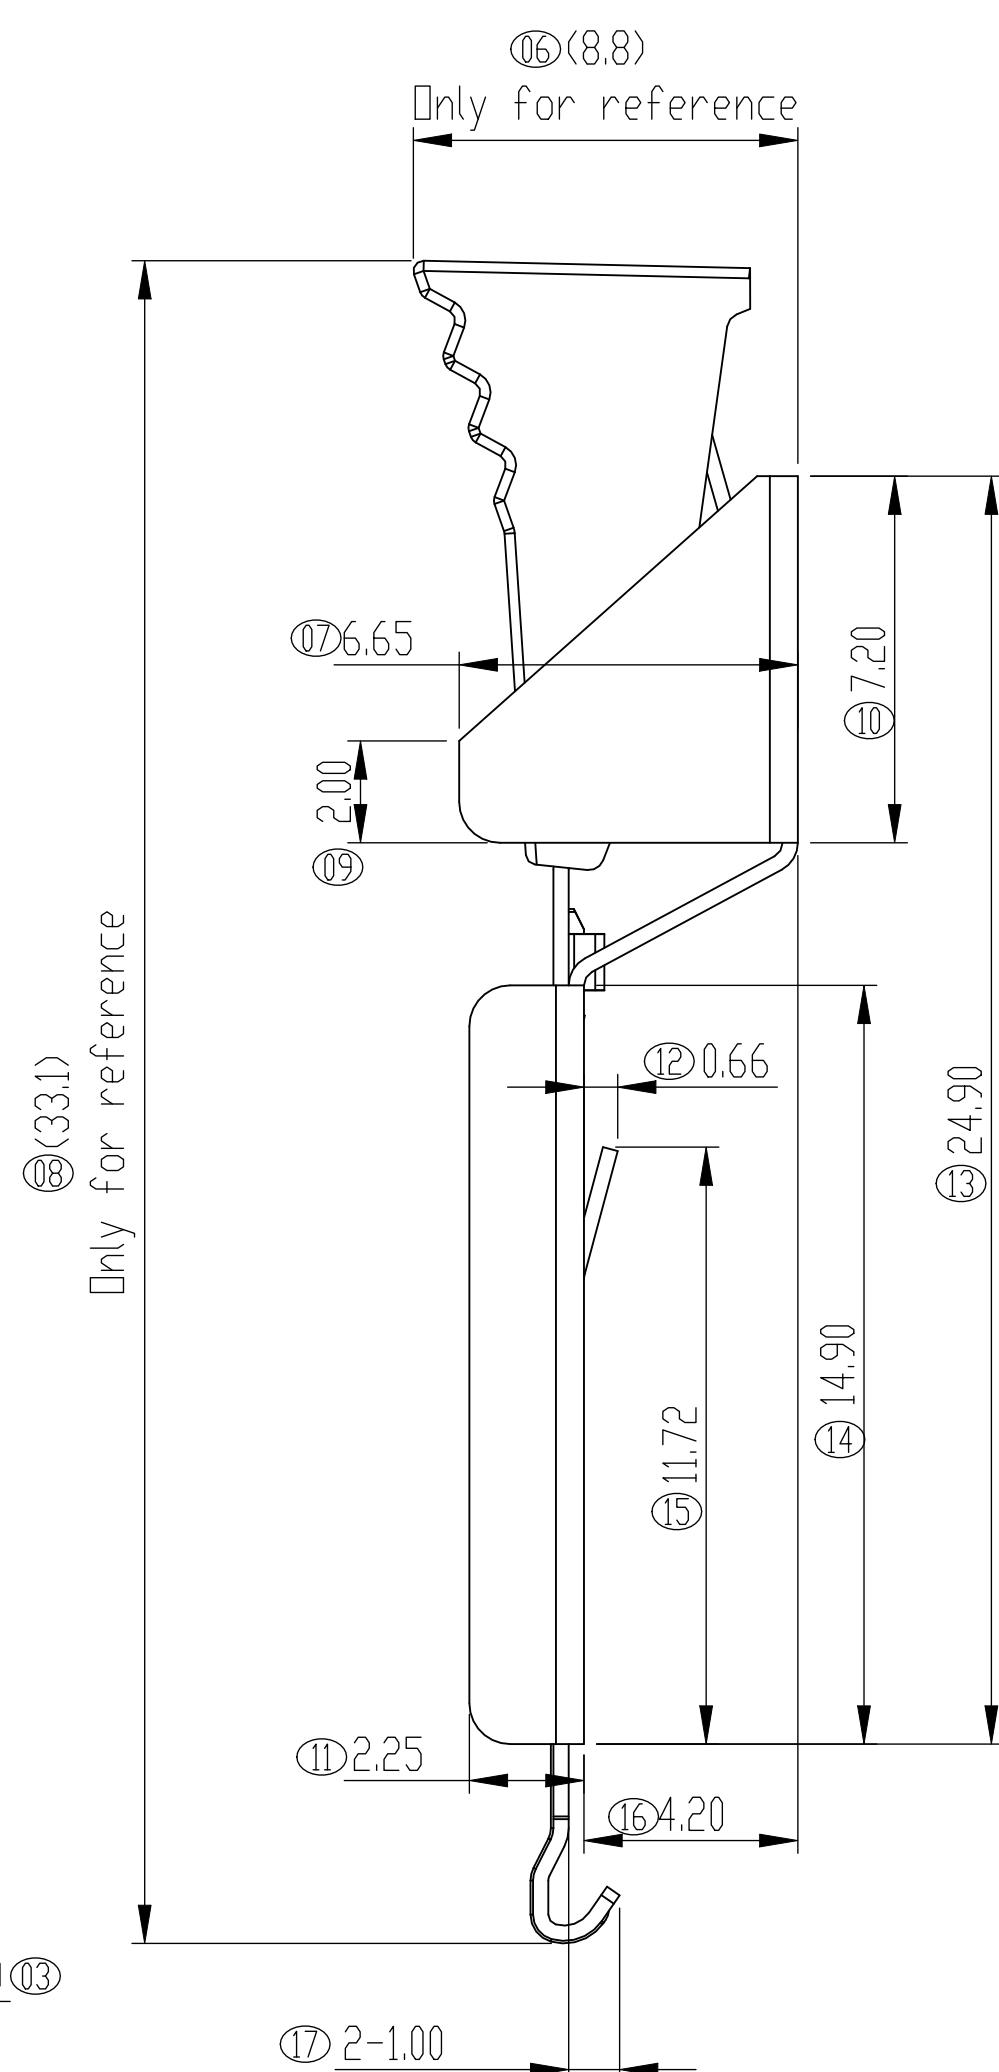
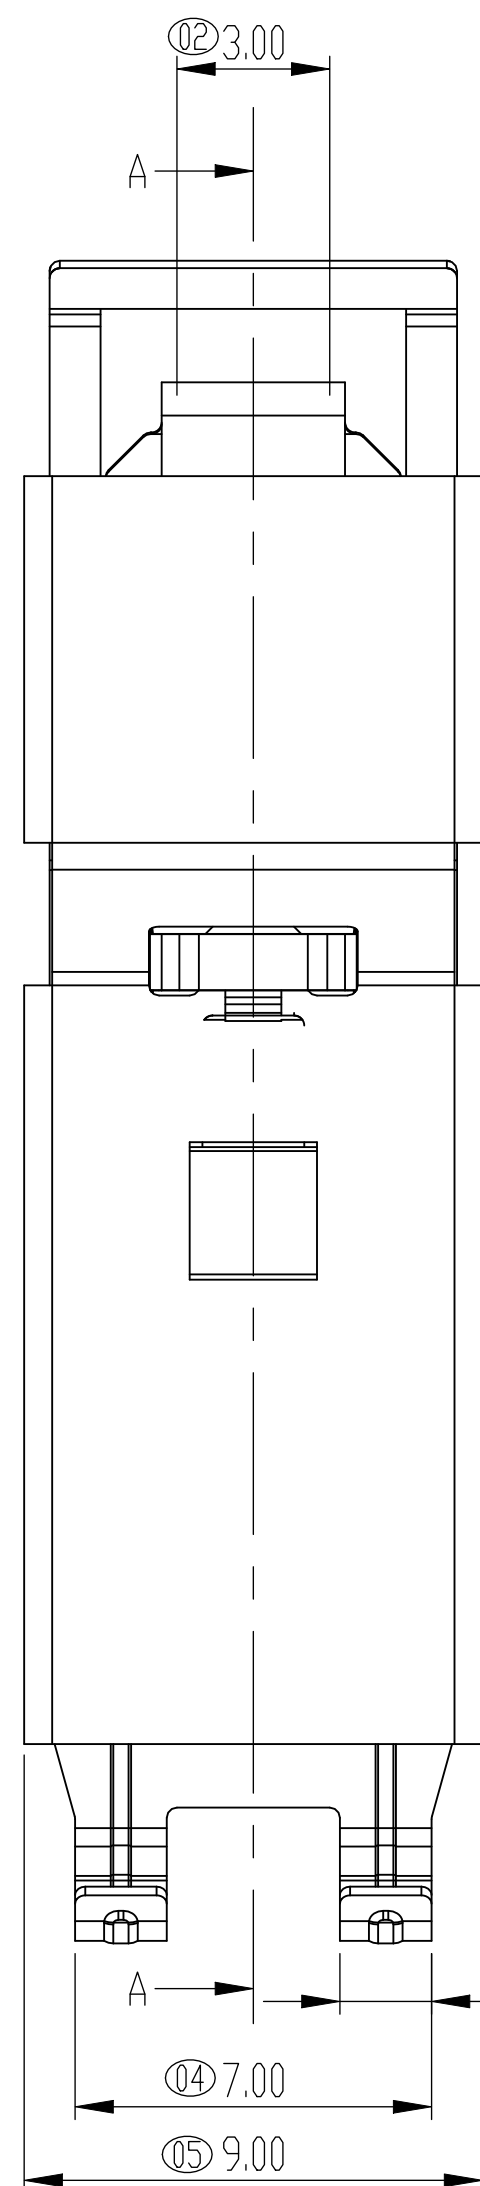


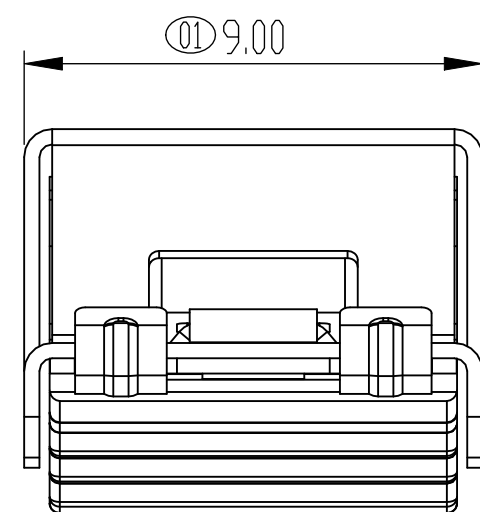

SECTION: A-A


Unless otherwise specified tolerance:


X.	± 0.50	X. °	$\pm 3^\circ$
.X	± 0.38	.X°	$\pm 2^\circ$
.XX	± 0.25		

Mark	NO.	File NO.	Signature	Date
	DRAW	TANG JIANPING 2020.12.04		
	CHK	Lawrecne 2021.8.31		
	MAN			
	STD	Juanli lai 2021.09.02		
	APP	Alan 2021.09.02		

Performance characteristics:

1. Main body part material
Insulator: PA6 black UL94V-0
Spring: SUS304
Shell: SUS304
2. Electrical requirements:
None
3. Mechanical requirements
Retention force: $\geq 30\text{N}$
4. Environment specification
Working temperature: $-55^{\circ}\text{C} \sim +105^{\circ}\text{C}$
5. Packing & storing
Storing condition: temperature of $-10^{\circ}\text{C} \sim +40^{\circ}\text{C}$
below 80% relative humidity
6. To prevent the pollution of the environment product info
RoHS agreement: In line with the European Union RoHS.

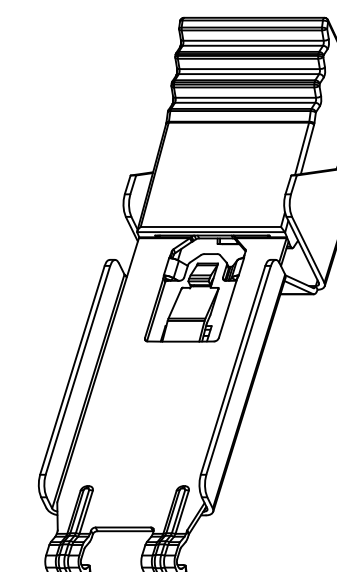

					1865 series lock catch	SL0. 1865. 017			
						Projection	Rev.	Weight	Scale
Mark	NO.	File NO.	Signature	Date			S0		
DRAW	TANG JIANPING 2020.12.04								
CHK					18656016	All Dimensions in mm		Sheet 1 of 1	
MAN	Lawrecne 2021.8.31								
STD	Juanli lai 2021.09.02								
APP	Alan 2021.09.02								
						 SHINNING SHENZHEN SHINNING ELECTRONIC CO.,LTD.			