

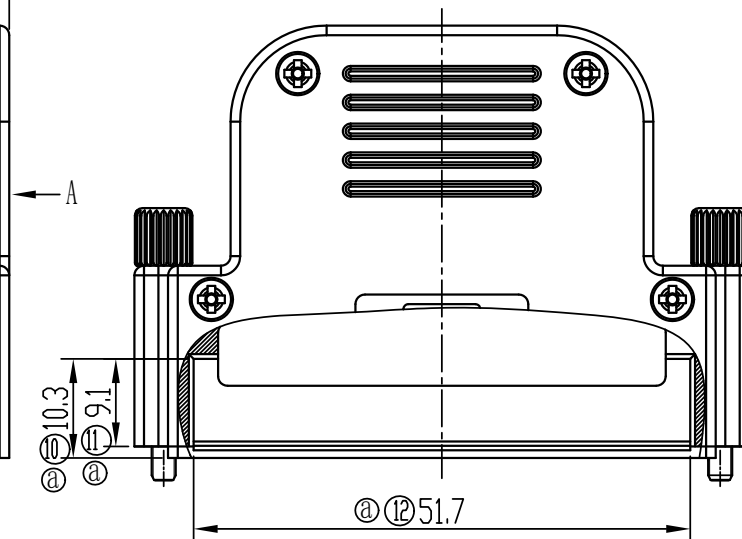
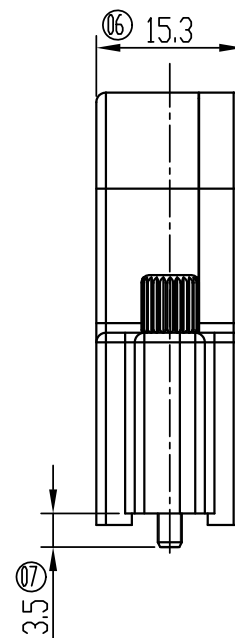
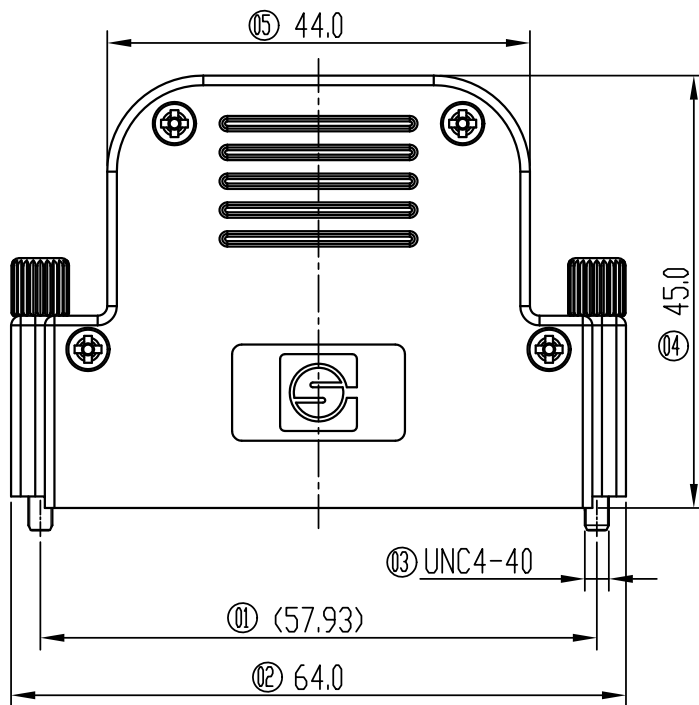
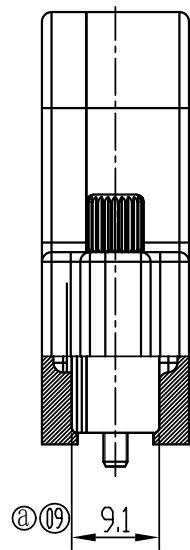


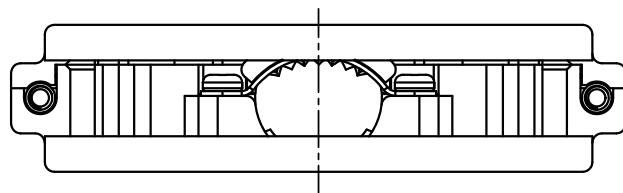

VIEW A

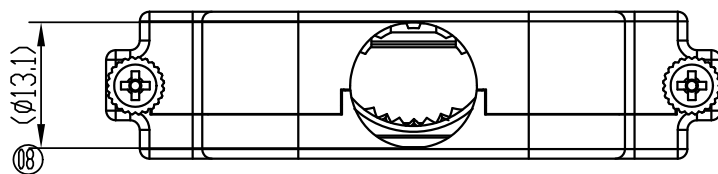

Unless otherwise specified tolerance:

X.	±0.50	X.°	±3°
.X	±0.38	.X°	±2°
.XX	±0.25		

Performance characteristics:

1. Main body part material

Crust: Zinc alloy, surface plating Ni

Cable clamp: Steel, surface plating Sn

2. Environment specification

Working temperature: -55℃~+85℃

3. Packing & storing

Method of packing: PE bag, outer box

Storing condition: Temperature of -10℃~+40℃
below 80% relative humidity

4. To prevent the pollution of the environment product info

RoHS agreement: In line with the European Union RoHS

					1865 series MDR-68PIN connector male crust	SLO. 1865. 007			
④	4	90438	Lawrence	2016-01-30		Projection	Rev.	Weight	Scale
Mark	NO.	File NO.	Signature	Date			A1		
DRAW		Lawrence 2015.08.26				All Dimensions in mm Sheet 1 of 1			
CHK									
MAN									
STD									
APP					18656006	 SHINNING SHENZHEN SHINNING ELECTRONIC CO.,LTD.			