
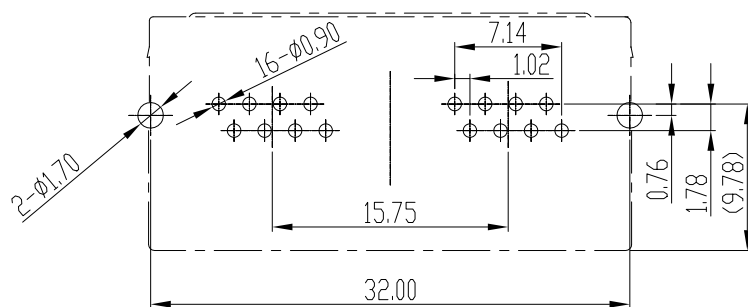
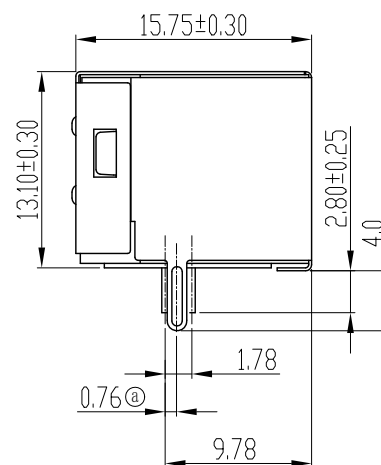
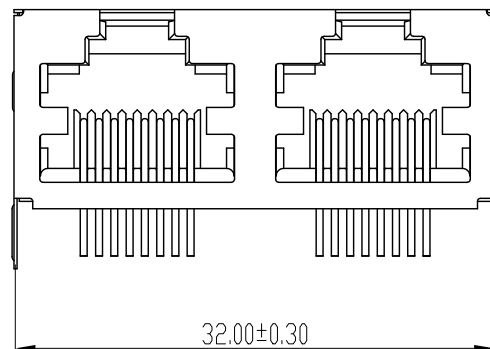
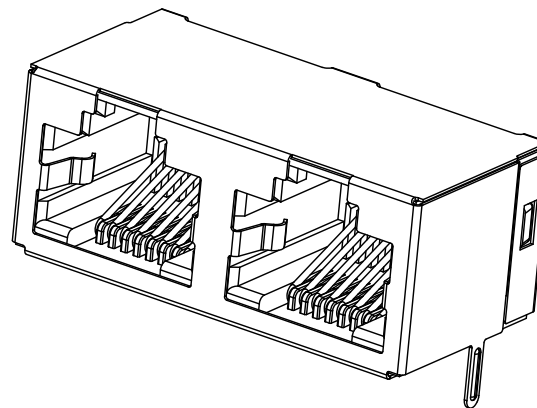


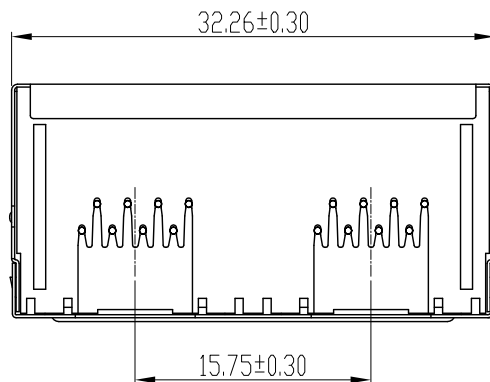

PCB Layout
Tolerance: ± 0.05

Unless otherwise specified tolerance:

X.	± 0.50	X. °	$\pm 3^\circ$
.X	± 0.38	.X °	$\pm 2^\circ$
.XX	± 0.25		

Performance characteristics:

1.Main body part material

Insulator: PBT black UL94V-0

Contact terminal: Phosphor bronze, $1.27 \mu\text{m}$ Min. Ni under plated,
Outer plating Gold Flash.

Shield: Copper alloy, Plated Ni.

2.Electrical requirements

Current rating: 1.5 A

Contact resistance: $\leq 30 \text{ m}\Omega$

Voltage rating: 125 V

Insulation resistance: 500 M Ω

Withstanding voltage: 1000 Vr.m.s, 1mA, 60s

3.Environment specification

Working temperature: $-40^\circ\text{C} \sim +85^\circ\text{C}$

Resistance to soldering heat: $260 \pm 5^\circ\text{C}$, 10s, Wave solder.

4.Packing & storing

Method of packing: Tray, outer Box

Storing condition: Temperature of $-10^\circ\text{C} \sim +40^\circ\text{C}$
below 80% relative humidity

5.Style of installation: PCB soldering installation

6.To prevent the pollution of the environment product info

RoHS agreement: In line with the European Union RoHS

					RJ45 Connector 1*2 With Shield Without LED and POST	SL0. 1605. 010			
④	1	387892	An. Cheng	2019. 05. 21		Projection	Rev.	Weight	Scale
Mark	NO.	File NO.	Signature	Date			A1		
DRAW	An. Cheng		2018. 06. 07						
CHK	Tim2019.6.10								
MAN									
STD	Emily2019.6.11			1605-280-51-1	All Dimensions in 		Sheet 1 of 1		
APP	Alan2019.6.11				 SHINNING SHENZHEN SHINNING ELECTRONIC CO.,LTD.				