
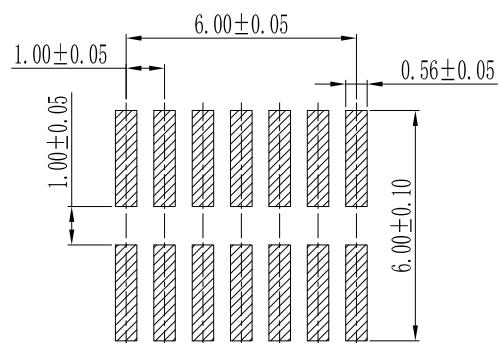
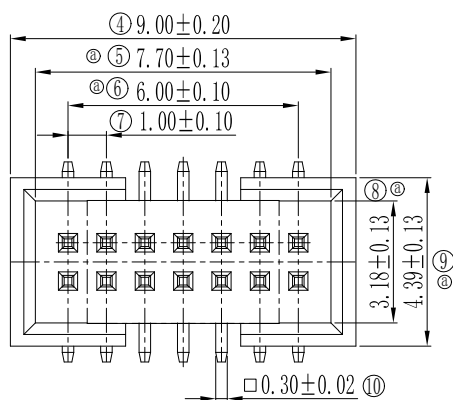
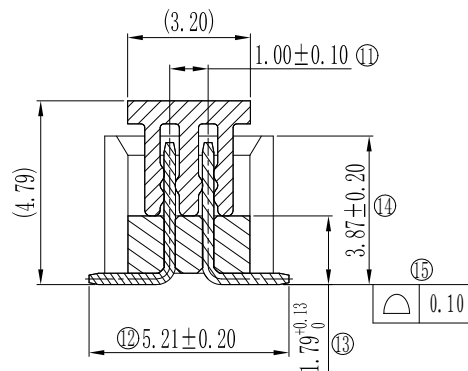


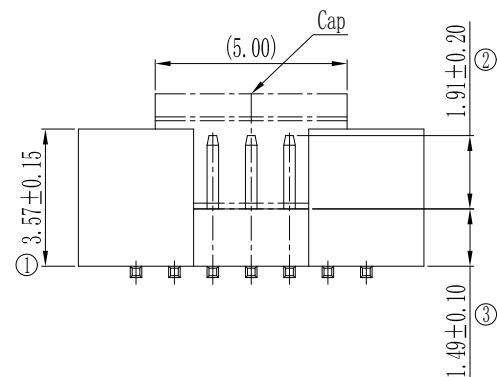

Recommended PCB Layout

Unless otherwise specified tolerance:

X.	±0.50	X. °	±3°
.X	±0.38	.X°	±2°
.XX	±0.25		

Performance characteristics:

- 1.Main body part material
Insulator: LCP Black UL94V-0
Contact terminal: Brass,1.27μm Ni under plated,contact area plated Au 0.08μm min. ,tail plated Au 0.08-0.2μm
- 2.Electrical requirements:
Current rating: 1.5 A
Contact resistance: ≤20 mΩ
Insulation resistance: ≥1000 MΩ
Withstanding voltage: 500 Vr.m.s, 1mA, 60s
- 3.Mechanical requirements
Retention force: ≥1.5 N/pin
- 4.Environment specification
Working temperature: -40℃~105℃
Humidity: ≤93% at 40℃
Resistance to soldering heat: 260℃, 30s(SMT)
- 5.Packing & storing
Method of packing: Tape & Reel, outer box
Storing condition: temperature of -10℃~+50℃
below 80% relative humidity
- 7.Style of installation: SMT
- 8.To prevent the pollution of the environment product info
RoHS agreement:In line with the european union RoHS.

					1.00mm pitch Box Header SMT 2x07pin (Customer:HUAWEI)	SL0. 1232. 001			
④	4	377708	Zhaolin	2019.03.25		Projection	Rev.	Weight	Scale
Mark	NO.	File NO.	Signature	Date					
DRAW			Zhaolin 2019.02.12						
CHK			Tim2019.6.11						
MAN			Emily2019.6.17						
STD			Alan2019.6.17						
APP									
						1232-071-09-3			
						All Dimensions in mm Sheet 1 of 1			
						SHINNING SHENZHEN SHINNING ELECTRONIC CO.,LTD.			