



	0.10	N≤20
	0.15	N>20

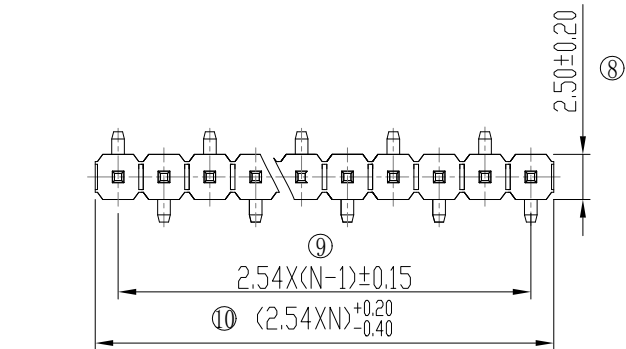


N= Number of contacts

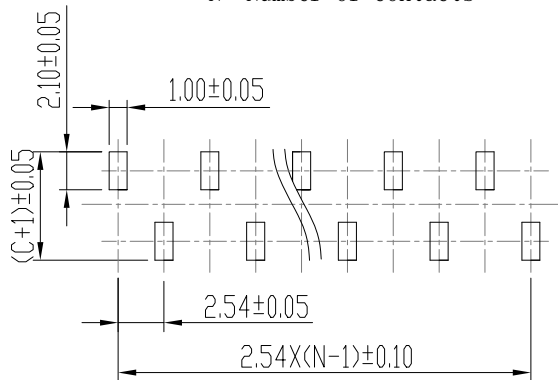

PCB Layout

Performance characteristics:

- Main body part material  
Insulator: See part number rule  
Contact terminal: Brass, 1.27μm Ni under plated, outer plating see part number rule
- Electrical requirements:  
Current rating: 3 A  
Contact resistance: ≤20 mΩ  
Insulation resistance: ≥5000 MΩ  
Withstanding voltage: 1000 Vr.m.s, 1mA, 60s
- Mechanical requirements  
Retention: ≥10 N/pin
- Environment specification  
Working temperature: -55°C~+125°C  
Resistance to soldering heat: 260°C±5°C, 10s
- Packing & storing  
Method of packing: tape & reel, outer box  
Storing condition: temperature of -10°C~+40°C below 80% relative humidity
- Style of installation: SMT
- To prevent the pollution of the environment product info  
RoHS agreement: In line with the european union RoHS.

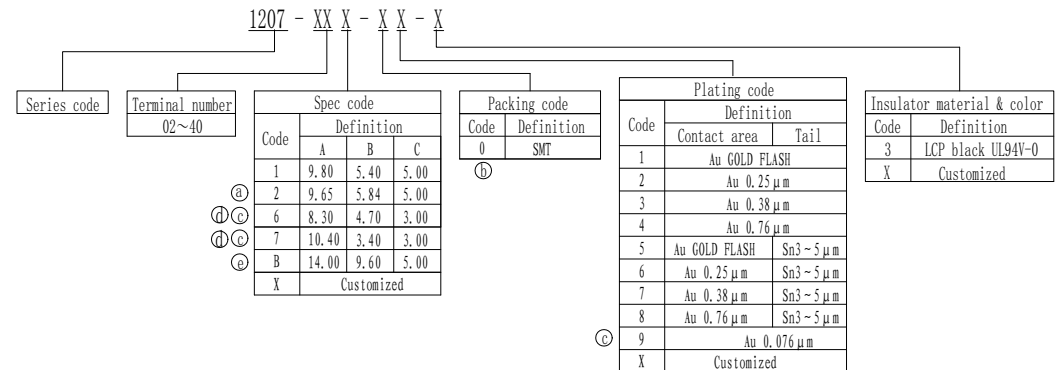

Unless otherwise specified tolerance:

X.	±0.50	X.°	±3°
.X	±0.38	.X°	±2°
.XX	±0.25		

①	1	386430	Huanjiang Xu	2019.05.15
②	3	278807	Huanjiang Xu	2018.01.21
③	3	271807	Huanjiang Xu	2017.12.27
Mark	NO.	File NO.	Signature	Date
DRAW		J. A2009.03.18		
CHK		Tim2019.5.16		
MAN		Weini2019.5.24		
STD		Alan2019.5.24		
APP				

2.54mm Pitch single row,  
SMT strips housing 2.50mm

1207-XXX-XX-X

SLO. 1207. 100

Projection	Rev.	Weight	Scale
	A5		
Sheet 1		1 of 1	
SHINNING SHENZHEN SHINNING ELECTRONIC CO. LTD.			