

Unless otherwise specified tolerance:

X.	±0.50	X.°	±3°
.X	±0.38	.X°	±2°
.XX	±0.25		

- Ⓐ Performance characteristics:
 - 1. Main body part material
Insulator: PA66, Black UL94V-0
- Ⓑ 2. Electrical requirements:
 - Current rating: 3 A
 - Voltage rating: 250 V
 - Insulation resistance: ≥1000 MΩ
 - Withstanding voltage: 1500 Vr.m.s, 1mA, 60s
- Ⓒ 3. Environment specification
 - Working temperature: -40°C~+105°C
- 4. Packing & storing
 - Method of packing: Plastic bag, inner box, outer box
 - Storing condition: Temperature of -10°C~+40°C
below 80% relative humidity
- 5. Style of installation: Applicable for crimp cable installation
- 6. To prevent the pollution of the environment product info
RoHS agreement: In line with the European Union RoHS.





Part No.	Circuit	A	B	C	D
13431044	03	5.00	10.5	8.1	8.20
13431084	04	7.50	13.0	10.6	10.70

①	1	326863	Jiangbo Liu	2018.08.09
②	2	228395	An.Cheng	2017.07.18
③	1	SN-0003561	An.Cheng	2014.04.18
Mark	NO.	File NO.	Signature	Date
DRAW		An.Cheng	2017.06.19	
CHK		Tim2018.8.24		
MAN		Spring2018.8.25		
STD		Alan2018.8.25		
APP				

2.50mm Pitch wafer male housing

13431084
13431044

SLO.1343.106			
Projection	Rev.	Weight	Scale
	A4		
All Dimensions in mm		Sheet 1 of 2	
SHINNING SHENZHEN SHINNING ELECTRONIC CO.LTD.			

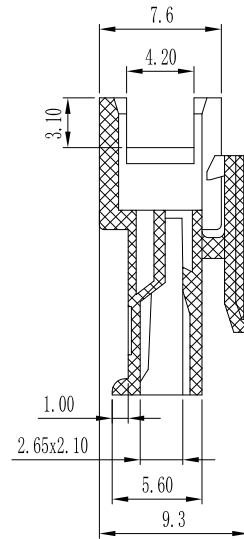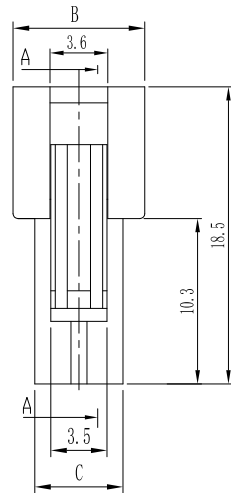

SECTION A-A

- Ⓐ Performance characteristics:
 1. Main body part material
Insulator: PA66, Black UL94V-0
- Ⓑ 2. Electrical requirements:
 - Current rating: 3 A
 - Voltage rating: 250 V
 - Insulation resistance: $\geq 1000 \text{ M}\Omega$
 - Withstanding voltage: 1500 Vr.m.s, 1mA, 60s
- Ⓒ 3. Environment specification
Working temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
- 4. Packing & storing
Method of packing: Plastic bag, inner box, outer box
Storing condition: Temperature of $-10^{\circ}\text{C} \sim +40^{\circ}\text{C}$
below 80% relative humidity
- 5. Style of installation: Applicable for crimp cable installation
- 6. To prevent the pollution of the environment product info
RoHS agreement: In line with the european union RoHS.

Part No.	Circuit	A	B	C	D
Ⓐ 13431083	02	2.50	8.2	5.5	5.70

Unless otherwise specified tolerance:

X.	± 0.50	X.°	$\pm 3^{\circ}$
.X	± 0.38	.X°	$\pm 2^{\circ}$
.XX	± 0.25		

Ⓐ	1	326863	Jiangbo Liu	2018.08.09
Ⓑ	2	228395	An.Cheng	2017.07.18
Ⓒ	1	SN-0003561	An.Cheng	2014.04.18
Mark	NO.	File NO.	Signature	Date
DRAW		An.Cheng	2017.06.19	
CHK		Tim 2018.8.24		
MAN				
STD		Spring 2018.8.25		
APP		Alan 2018.8.25		

2.50mm Pitch wafer
male housing

13431083

SLO.1343.106

Projection	Rev.	Weight	Scale
	A4		
All Dimensions in mm		Sheet 2 of 2	
SHINNING SHENZHEN SHINNING ELECTRONIC CO.LTD.			