


P.C.B Layout

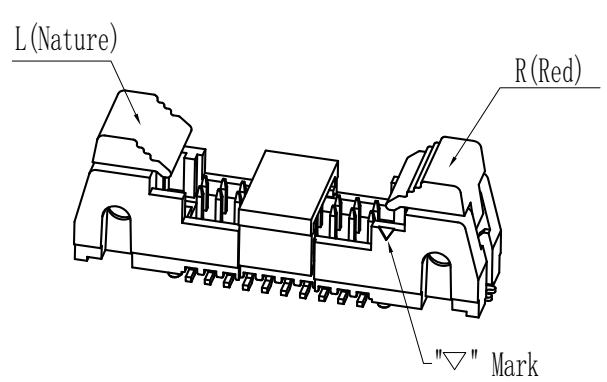


Dimension Table:

Part NO.	Circuit	A	B	C	D
1341-264-16-H	2X13	30.25	17.50	16.85	15.00
1341-304-16-H	2X15	32.75	20.00	19.35	17.50

Performance characteristics:

- Main body part material
Insulator:
Housing: LCP Nature UL94V-0
Latch: PA9T Nature/Red UL94V-0
Contact terminal: Brass, 1.27~2μm Ni under plated,
Contact area plating Au0.25μm, tail plating matte Sn 3μm Min.
- Electrical requirements:
Current rating: 1 A
Voltage rating: 150 V
Contact resistance: ≤30 mΩ
Insulation resistance: ≥500 MΩ
Withstanding voltage: 500 Vr.m.s, 1mA, 60s
- Environment specification
Working temperature: -40°C~+105°C
- Packing & storing
Method of packing: Reel, Outer box
Storing condition: Temperature of -10°C~+40°C
below 80% relative humidity
- Style of installation: SMT
- To prevent the pollution of the environment product info
RoHS agreement: In line with the european union RoHS.

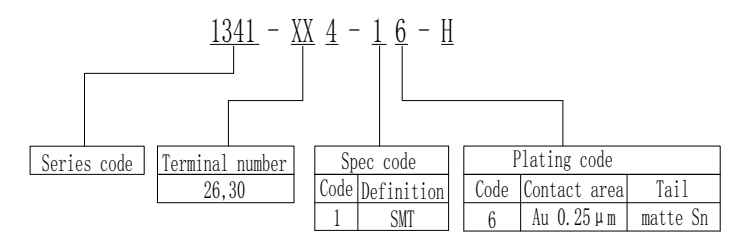

Unless otherwise specified tolerance:

X.	±0.50	X.°	±3°
.X	±0.38	.X°	±2°
.XX	±0.25		

Mark	NO.	File NO.	Signature	Date
DRAW				Tim Lv 2019.05.10
CHK			Lawrence	2019.10.16
MAN				
STD			Juanli lai	2019.10.15
APP			Alan	2019.10.15

SLO. 1341.027			
Projection	Rev.	Weight	Scale
	A0		
All Dimensions in mm		Sheet 1 of 1	
SHINNING SHENZHEN SHINNING ELECTRONIC CO.,LTD.			

1.25mm SMT Ejector Header

1341-XX4-16-H