


Performance characteristics:

1. Main body part material  
Insulator: PA66 Nature UL94V-0
2. Electrical requirements:  
Current rating: 3 A  
Voltage rating: 250 V  
Insulation resistance:  $\geq 1000 \text{ M}\Omega$   
Withstanding voltage: 1000 Vr.m.s, 1mA, 60s
- ③ 3. Environment specification  
Working temperature:  $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
4. Packing & storing  
Method of packing: Plastic bag, inner box, outer box  
Storing condition: Temperature of  $-10^{\circ}\text{C} \sim +40^{\circ}\text{C}$   
below 80% relative humidity
5. Style of installation: Applicable for crimp cable installation
6. To prevent the pollution of the environment product info  
RoHS agreement: In line with the European Union RoHS.

Size table:

P/N	Pin number	A	B	C
13431029	2	7.30	5.70	2.50
13431030	3	9.80	8.20	5.00
13431031	4	12.30	10.70	7.50
13431032	5	14.80	13.20	10.00
13431033	6	17.30	15.70	12.50
13431034	7	19.80	18.20	15.00
13431035	8	22.30	20.70	17.50
13431036	9	24.80	23.20	20.00
13431037	10	27.30	25.70	22.50
13431038	11	29.80	28.20	25.00
13431039	12	32.30	30.70	27.50
13431040	13	34.80	33.20	30.00
13431041	14	37.30	35.70	32.50
13431042	15	39.80	38.20	35.00

① Logo Mark:

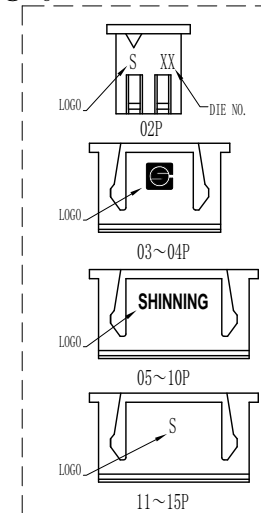

Unless otherwise specified tolerance:

X.	$\pm 0.50$	X.°	$\pm 3^{\circ}$
.X	$\pm 0.38$	.X°	$\pm 2^{\circ}$
.XX	$\pm 0.25$		

①	1	583571	An. Cheng	2022.08.12
②	1	SN-00003561	An. Cheng	2014.04.18
Mark	NO.	File NO.	Signature	Date
DRAW		J.A	2009-02-28	
CHK				
MAN				
STD				
APP				

2.50mm Pitch wafer female housing

13431029~13431042

SLO. 1343. 103

Projection Rev. Weight Scale

Sheet 1 1 of 1

SHINNING SHENZHEN SHINNING ELECTRONIC CO.,LTD.