


PCB Layout

Performance characteristics:

- Main body part material
Insulator: See part number rule
Contact terminal: Brass, 1.27 μm Ni under plated, outer plating see part number rule
- Electrical requirements:
Current rating: 1 A
Voltage rating: 250 V
Contact resistance: $\leq 10 \text{ m}\Omega$
Insulation resistance: >math>\geq 100 \text{ M}\Omega</math>
Withstanding voltage: 500 Vr.m.s, 1mA, 60s
- Environment specification
Working temperature: -25°C ~ +85°C
- Packing & storing
Method of packing: Plastic bag, outer box
Storing condition: Temperature of -10°C ~ +40°C below 80% relative humidity
- Style of installation: Solder PCB installation
- To prevent the pollution of the environment product info
RoHS agreement: Content

The 8th tail length code definition

Code	A	P/N
7	2.3	1341-XXX-7X-X

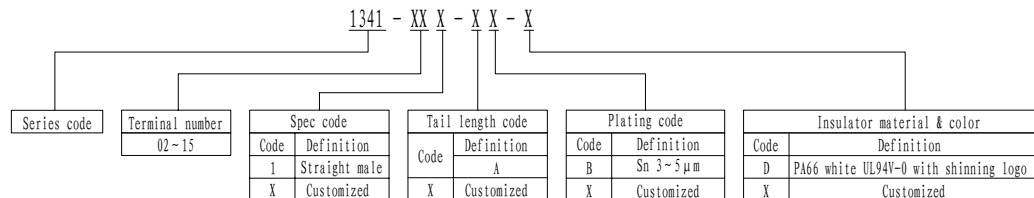

Unless otherwise specified tolerance:

X.	± 0.50	X.°	± 3°
.X	± 0.38	.X°	± 2°
.XX	± 0.25		

				1.25mm Pitch wafer straight male		SL0.1341.100				
Mark	NO.	File NO.	Signature	Date			Projection	Rev.	Weight	Scale
DRAW		J.A		2009-03-06				A0		
CHK							Sheet 1		1 of 1	
MAN							SHINNING SHENZHEN SHINNING ELECTRONIC CO.,LTD.			
STD					1341					
APP										