


- ① Performance characteristics:
1. Main body part material
Contact terminal: Phosphor bronze, 1.27μm Ni under plated, outer plating see part number rule.
 2. Electrical requirements:
Current rating: 7 A
Voltage rating: 250 V
Contact resistance: ≤10 mΩ
 3. Mechanical requirements
Insertion force: ≤15 N/pin(Use 1.14mm square pin)
Extraction force: ≥0.5 N/pin(Use 1.14mm square pin)
Wire gauge: AWG18~22
 4. Environment specification
Working temperature: -40°C~+105°C
 5. Packing & storing
Number of packing: 3000pcs/reel
Method of packing: Paper reel
Storing condition: temperature of -10°C~+40°C below 80% relative humidity
 6. Style of installation: Applicable for crimp cable installation
 7. To prevent the pollution of the environment product info
RoHS agreement: In line with the european union RoHS.

Part number rule:

Part No.	outer plating	
	Contact Area	Other Area
13443006	Au 0.38 μm	Gold Flash
① 13443018	Au 0.25 μm	Gold Flash
13443013	Gold Flash	

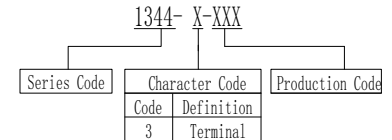

Unless otherwise specified tolerance:

X.	±0.50	X.°	±3°
.X	±0.38	.X°	±2°
.XX	±0.25		

①	1	120490	Change Yu	2016.06.13
②	1	SN-00003375	An.Cheng	2014.02.07
Mark	NO.	File NO.	Signature	Date
DRAW	An.Cheng 2010.11.29			
CHK	Alan 2016.10.10			
MAN	Eva 2016.10.11			
STD	Jiang 2016.10.11			
APP				

3.96mm Wafer Phosphor
bronze female terminal

134430XX

SL0.1344.010

Projection	Rev.	Weight	Scale
	A2		

All Dimensions in mm Sheet 1 of 1

