


- ⓑⓒⓓ Performance characteristics:
1. Main body part material
Contact terminal: Brass, 1.27μm Ni under plated, outer plating Sn 3~5μm.
 2. Electrical requirements:
Current rating: 7 A
Voltage rating: 250 V
Contact resistance: $\leq 10\text{ m}\Omega$
 3. Mechanical requirements
Insertion force: $\leq 15\text{ N/pin}$(Use 1.14mm square pin)
Extraction force: $\geq 0.5\text{ N/pin}$(Use 1.14mm square pin)
Wire gauge: AWG18~22
 4. Environment specification
Working temperature: -40°C ~ +105°C
 5. Packing & storing
Number of packing: 3000pcs/reel
Method of packing: Paper reel
Storing condition: temperature of -10°C ~ +40°C below 80% relative humidity
 6. Style of installation: With the female housing assembly
 7. To prevent the pollution of the environment product info
RoHS agreement: In line with the european union RoHS.

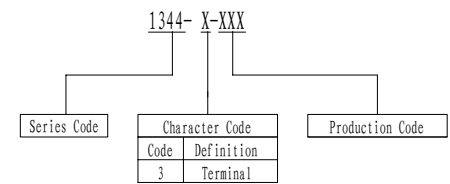

Unless otherwise specified tolerance:

X.	± 0.50	X.°	± 3°
.X	± 0.38	.X°	± 2°
.XX	± 0.25		

ⓓ	1	SN-00003375	An. Cheng	2014.02.07
ⓒ	1	SN-00003157	An. Cheng	2013.10.28
ⓑ	1	SN-00002808	An. Cheng	2013.06.08
Mark	NO.	File NO.	Signature	Date
DRAW	J. A 2009.02.03			
CHK				
MAN				
STD				
APP				

3.96mm Wafer female terminal

SL0. 1344. 102

Projection	Rev.	Weight	Scale
	A4		

All Dimensions in mm Sheet 1 of 1

13443001