

Ⓐ Performance characteristics:

1. Main body part material  
Insulator: PA66, Black UL94V-0

Ⓑ 2. Electrical requirements:

Current rating: 3 A  
Voltage rating: 250 V  
Insulation resistance:  $\geq 1000 \text{ M}\Omega$   
Withstanding voltage: 1500 Vr.m.s, 1mA, 60s

Ⓒ 3. Environment specification

Working temperature:  $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

4. Packing & storing

Method of packing: Plastic bag, inner box, outer box  
Storing condition: Temperature of  $-10^{\circ}\text{C} \sim +40^{\circ}\text{C}$   
below 80% relative humidity

5. Style of installation: Applicable for crimp cable installation

6. To prevent the pollution of the environment product info  
RoHS agreement: In line with the European Union RoHS.

Part No.	Circuit	A	B
13431043	03	8.0	5.00
13431082	04	10.5	7.50

Unless otherwise specified tolerance:

X.	$\pm 0.50$	X.°	$\pm 3^{\circ}$
.X	$\pm 0.38$	.X°	$\pm 2^{\circ}$
.XX	$\pm 0.25$		






①	1	326863	Jiangbo Liu	2018.08.09
Ⓒ	1	228395	An.Cheng	2017.07.18
Ⓓ	1	SN-0003561	An.Cheng	2014.04.18
Mark	NO.	File NO.	Signature	Date
DRAW		An.Cheng 2017.06.19		
CHK		<b>Tim2018.8.24</b>		
MAN				
STD		<b>Spring2018.8.25</b>		
APP		<b>Alan2018.8.25</b>		

2.50mm Pitch wafer  
female housing

13431082  
13431043

SL0.1343.105

Projection	Rev.	Weight	Scale
	A4		
All Dimensions in mm		Sheet 1 of 2	
SHINNING SHENZHEN SHINNING ELECTRONIC CO.,LTD.			

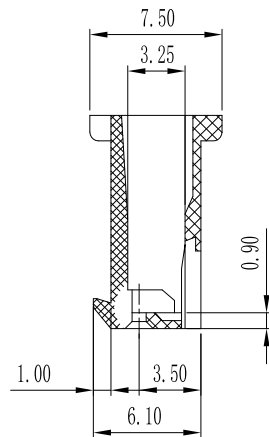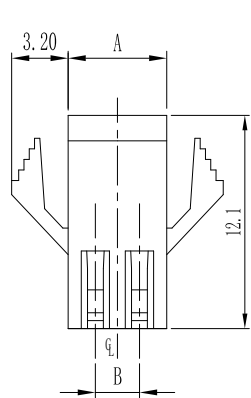

- Ⓐ Performance characteristics:
  1. Main body part material  
Insulator: PA66, Black UL94V-0
- Ⓑ 2. Electrical requirements:
  - Current rating: 3 A
  - Voltage rating: 250 V
  - Insulation resistance:  $\geq 1000 \text{ M}\Omega$
  - Withstanding voltage: 1500 Vr. m. s, 1mA, 60s
- Ⓒ 3. Environment specification
  - Working temperature:  $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
- 4. Packing & storing
  - Method of packing: Plastic bag, inner box, outer box
  - Storing condition: Temperature of  $-10^{\circ}\text{C} \sim +40^{\circ}\text{C}$   
below 80% relative humidity
- 5. Style of installation: Applicable for crimp  
cable installation
- 6. To prevent the pollution of the environment product info  
RoHS agreement: In line with the European Union RoHS.

Part No.	Circuit	A	B
Ⓐ 13431081	02	5.6	2.50

Unless otherwise specified tolerance:

X.	$\pm 0.50$	X. °	$\pm 3^{\circ}$
.X	$\pm 0.38$	.X °	$\pm 2^{\circ}$
.XX	$\pm 0.25$		

Ⓐ	1	326863	Jiangbo Liu	2018.08.09
Ⓑ	1	228395	An. Cheng	2017.07.18
Ⓒ	1	SN-0003561	An. Cheng	2014.04.18
Mark	NO.	File NO.	Signature	Date
DRAW		An. Cheng 2017.06.19		
CHK		<b>Tim2018.8.24</b>		
MAN				
STD		<b>Spring2018.8.25</b>		
APP		<b>Alan2018.8.25</b>		

2.50mm Pitch wafer  
female housing

13431081

SLO. 1343. 105

Projection	Rev.	Weight	Scale
	A4		
All Dimensions in mm		Sheet 2 of 2	
SHINNING SHENZHEN SHINNING ELECTRONIC CO.,LTD.			