


PCB LAYOUT

Performance characteristics:

1. Main body part material  
Insulator: See part number rule  
Contact terminal: Brass, 1.27 μm Ni under plated, outer plating see part number rule
2. Electrical requirements:  
Current rating: 3 A  
Contact resistance: < 20 mΩ  
Insulation resistance: > 5000 MΩ  
Withstanding voltage: 1000 Vr.m.s, 1ma, 60s
3. Mechanical requirements  
Retention: > 10 N/pin
4. Environment specification  
Working temperature: -55°C ~ +125°C  
Humidity: < 93% at 40°C  
Resistance to soldering heat: 260°C ± 5°C, 10s
5. Packing & storing  
Method of packing: PE bag, outer box  
Storing condition: Temperature of -10°C ~ +40°C below 80% relative humidity
6. Style of installation: Solder pcb installation
7. To prevent the pollution of the environment product info  
RoHS agreement: In line with the European Union RoHS.

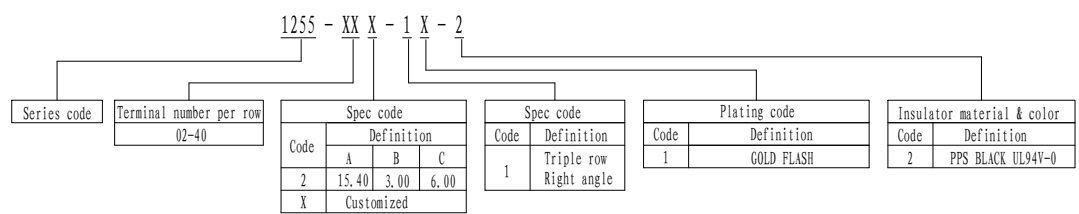

Unless otherwise specified tolerance:

X.	± 0.50	X.°	± 3°
.X	± 0.38	.X°	± 2°
.XX	± 0.25		

①	1	596051	Tim Lv	2023.03.07
Mark	NO.	File NO.	Signature	Date
DRAW	Tim Lv 2013.04.24			
CHK				
MAN				
STD				
APP				

2.54mm pitch triple row terminal strips right angle

1255-XXX-1X-2

SL0.1255.101			
Projection	Rev.	Weight	Scale
	A1		
All Dimensions in mm		Sheet 1 of 1	
SHINNING SHENZHEN SHINNING ELECTRONIC CO.,LTD.			