
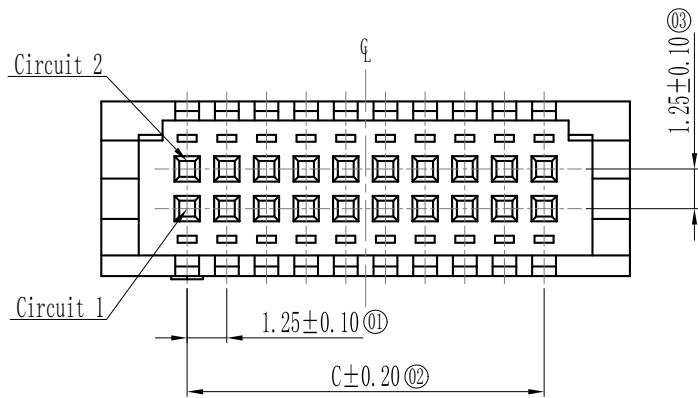
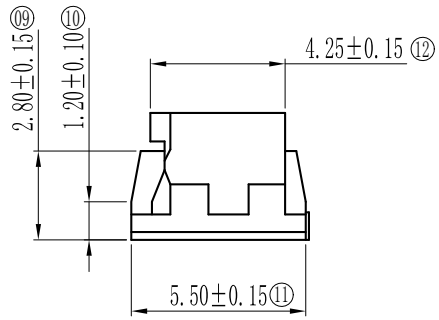


- Performance characteristics:
1. Main body part material
Insulator: PA66 Nature UL94V-0
 2. Electrical requirements:
Insulation resistance: $\geq 500 \text{ M}\Omega$
Withstanding voltage: 500 Vr.m.s, 1mA, 60s
 3. Mechanical requirements
Wire gauge: AWG26~30
 4. Environment specification
Working temperature: $-40^\circ\text{C} \sim +105^\circ\text{C}$
 5. Packing & storing
Method of packing: Plastic bag, outer box
Storing condition: Temperature of $-10^\circ\text{C} \sim +40^\circ\text{C}$
below 80% relative humidity
 6. Style of installation: Applicable for crimp cable installation
 7. To prevent the pollution of the environment product info
RoHS agreement: In line with the European Union RoHS.

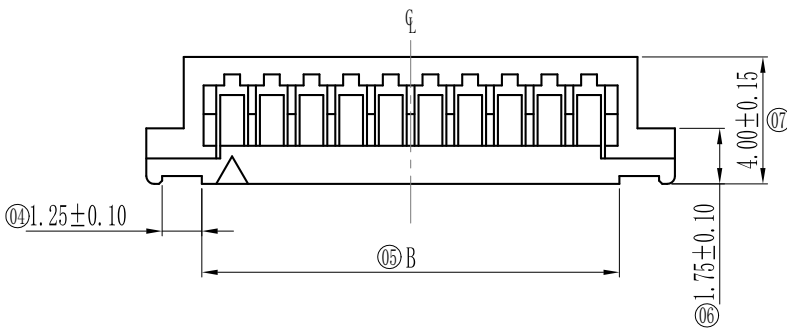

Size table:

P/N	Pin number	A	B	C
13411310	2*13	20.41	16.91	15.00
13411311	2*15	22.91	19.41	17.50

Unless otherwise specified tolerance:

X.	± 0.50	X.°	$\pm 3^\circ$
.X	± 0.38	.X°	$\pm 2^\circ$
.XX	± 0.25		

Mark	NO.	File NO.	Signature	Date	1.25mm Pitch Dual Row wafer female housing	SLO. 1341. 023			
DRAW		Tim Lv	2019.05.10			Projection	Rev.	Weight	Scale
CHK		Lawrence2019.5.20					A0		
MAN		Weini2019.5.24				All Dimensions in mm Sheet 1 of 1			
STD		Alan2019.5.24				SHINNING SHENZHEN SHINNING ELECTRONIC CO.,LTD.			
APP						134113XX			