

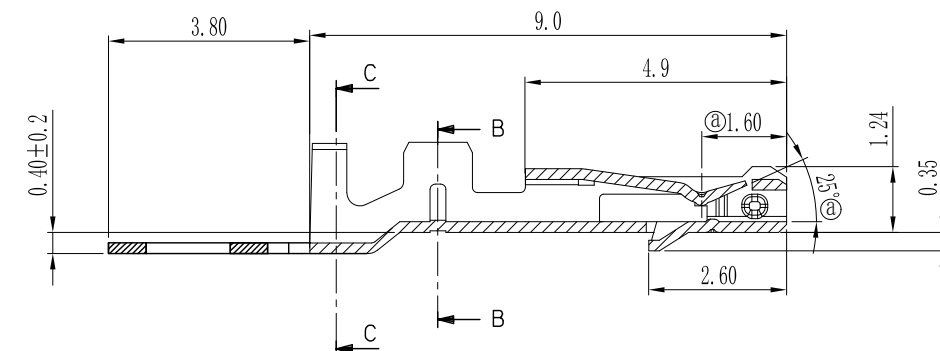



SECTION B-B



SECTION C-C



Insulation Diameter Crimping tool T=1.8mm
Wire gauge: AWG22~26



Conductor Diameter Crimping tool T=1.3mm
Wire gauge: AWG22~26

Performance characteristics:

1.Main body part material

Contact terminal: Phosphor bronze, 1.27 μ m Min. Ni under plated, outer plating Sn 3 μ m Min..

2. Electrical requirements:

Current rating: 2 A/AWG22#

Contact resistance: $30\text{ m}\Omega \triangle 10\text{ m}\Omega$

Voltage rating: 250V

3. Mechanical requirements

Wire gauge: AWG#22~26, Wire Insulation Diameter: 1.5mm Max.

Mating force: 2.5N/Pin Max.

Unmating force: 0.25N/Pin Min.

Retention force: 9.8N/Pin Min.

Durability times:10 times

4. Environment specification

Working temperature: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$

5. Packing & storing



Method of packing: Paper reel

Storing condition: temperature of $-10^{\circ}\text{C}\sim+40^{\circ}\text{C}$
below 80% relative humidity

6. Style of installation: With the housing assembly

7.To prevent the pollution of the environment product info

RoHS agreement: In line with the European Union RoHS.

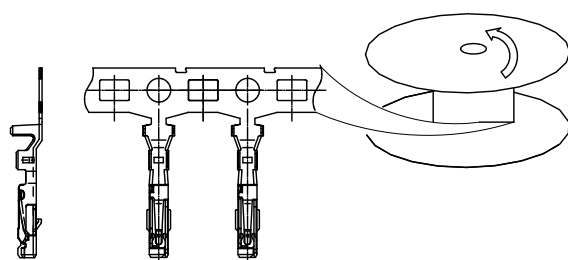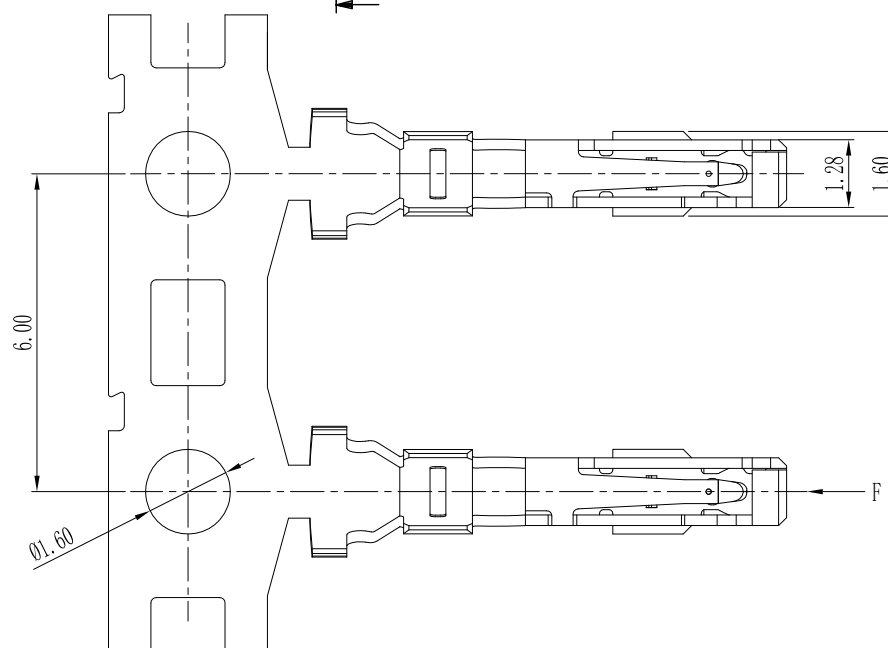

Packing draw

Unless otherwise specified tolerance:

X.	±0.50	X. °	±3°
.X	±0.38	.X °	±2°
.XX	±0.25		

④	4	523225	An. Cheng	2021.08.2
Mark	NO.	File NO.	Signature	Date
DRAW	An. Cheng 2021.01.28			
CHK	Tim 2021.08.24			
MAN				
STD	Juanli lai 2021.08.26			
APP	Alan 2021.08.26			

2.0 Wafer Female Terminal

13463503

SL0. 1346. 022			
Projection	Rev.	Weight	Scale
	A1		
All Dimensions in mm		Sheet 1 of 1	
 SHINNING SHENZHEN SHINNING ELECTRONIC CO.,LTD.			