




F view

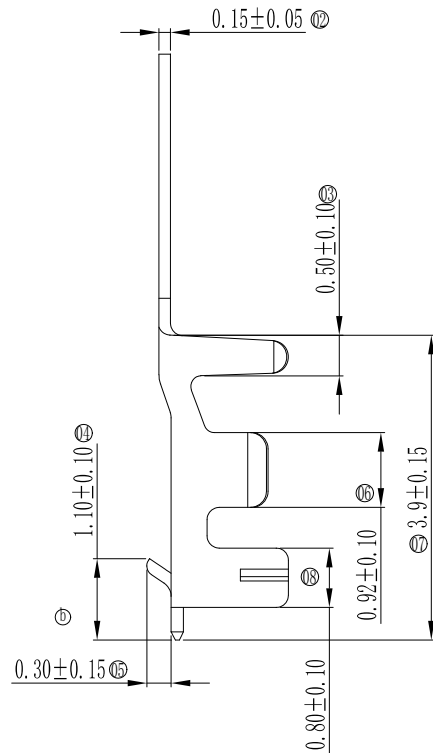

SEC:A-A



SEC:B-B

Performance characteristics:

1. Main body part material

Contact terminal: Phosphor Bronze, 1.27μm Ni under plated, outer plating see the list.

2. Electrical requirements:

Current rating: 1A

Voltage rating: 150 V

Contact resistance: ≤30 mΩ

3. Mechanical requirements

Wire gauge: AWG26~30

4. Environment specification

Working temperature: -40°C~+110°C

5. Packing & storing

Method of packing: Paper reel

Storing condition: temperature of -10°C~+40°C below 80% relative humidity

6. Style of installation: Applicable for crimp cable installation

7. To prevent the pollution of the environment product info

RoHS agreement: In line with the european union RoHS.

P/N & plating

P/N	plating	
	contact area	Tail
13413301	Sn 3~5 μm	Sn 3~5 μm
② 13413303	Au 0.25 μm	gold flash
③ 13413304	Au 0.38 μm	gold flash

①	1	437874	LinZhao	2020.01.14
②	1	291831	An.cheng	2018.03.27
③	5	151265	LinZhao	2016.09.26
Mark	NO.	File NO.	Signature	Date
DRAW	An.Cheng 2013-10-15			
CHK	Tim 2020.03.16			
MAN				
STD	Juanli lai 2020.03.17			
APP	Alan 2020.03.17			

1.25mm Wafer female terminal

1341330X

SLO. 1341.006

Projection Rev. Weight Scale

Projection Rev. Weight Scale

All Dimensions in mm Sheet 1 of 1

SHINNING SHENZHEN SHINNING ELECTRONIC CO. LTD.

Unless otherwise specified tolerance:

X.	±0.50	X.°	±3°
.X	±0.38	.X°	±2°
.XX	±0.25		