
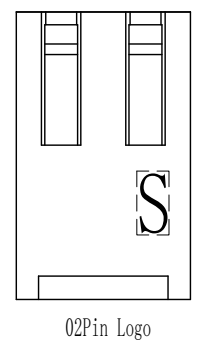


- Performance characteristics:
1. Main body part material
Insulator: PA66 Nature UL94V-0
 2. Electrical requirements:
Current rating: 7 A
Voltage rating: 250 V
Insulation resistance: $\geq 1000 \text{ M}\Omega$
Withstanding voltage: 1500 Vr.m.s, 1mA, 60s
 3. Environment specification
Working temperature: $-40^\circ\text{C} \sim +105^\circ\text{C}$
 4. Packing & storing
Method of packing: Plastic bag, inner box, outer box
Storing condition: Temperature of $-10^\circ\text{C} \sim +40^\circ\text{C}$
below 80% relative humidity
 5. Style of installation: Applicable for crimp cable installation
 6. To prevent the pollution of the environment product info
RoHS agreement: In line with the european union RoHS.

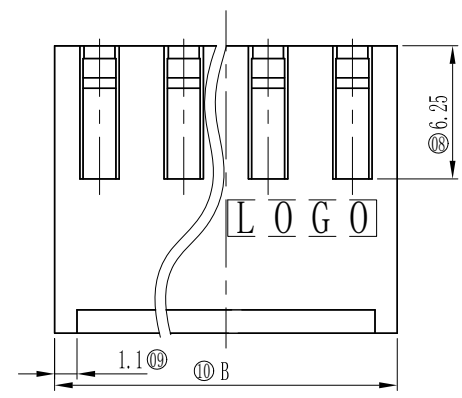

① Size table:

P/N	Pin number	A	B	LOGO
13441012	2	3.96	8.15	S
13441013	3	7.92	12.11	SHINNING
13441014	4	11.88	16.07	
13441015	5	15.84	20.03	
13441016	6	19.80	23.99	
13441017	7	23.76	27.95	
13441018	8	27.72	31.91	
13441019	9	31.68	36.00	
13441020	10	35.64	39.96	
13441021	11	39.60	43.92	
13441022	12	43.56	47.88	

Unless otherwise specified tolerance:

X.	±0.50	X.°	±3°
.X	±0.38	.X°	±2°
.XX	±0.25		

①	1	268124	An. Cheng	2017.12.14
Mark	NO.	File NO.	Signature	Date
DRAW	An. Cheng 2013-12-26			
CHK	Tim2018.1.4			
MAN				
STD	Spring2018.1.5			
APP	Alan2018.1.5			

3.96mm Pitch wafer female housing (HUAWEI)

SL0.1344.001

Projection	Rev.	Weight	Scale
	A1		

All Dimensions in mm Sheet 1 of 1

