

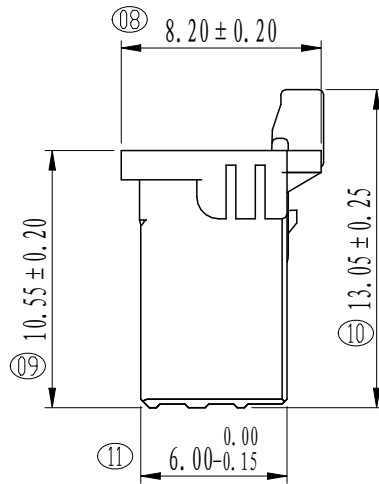
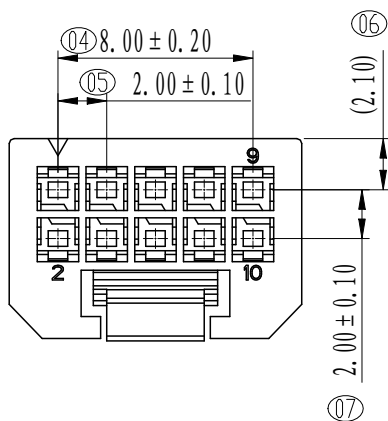
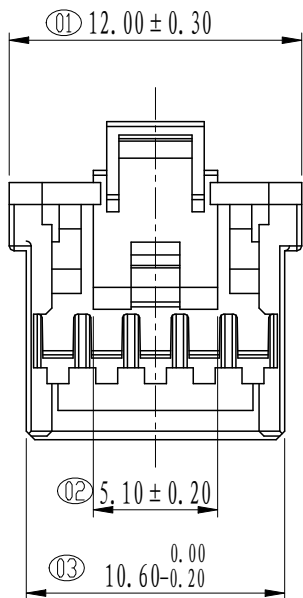





Unless otherwise specified tolerance:

X.	±0.50	X.°	±3°
.X	±0.38	.X°	±2°
.XX	±0.25		



- Performance characteristics:
- 1.Main body part material
Insulator: PA66 UL94V-0,Color Natural.
 - 2.Electrical requirements:
Insulation resistance: ≥1000 MΩ (after installation)
Withstanding voltage: 1000 Vr.m.s, 1mA, 60s (after installation)
 - 3.Mechanical requirements
3-1.Terminal retention force: ≥9.8N/pin
3-2.Lock catch retention force: ≥9.8N/pin
 - 3.Environment specification
Working temperature: -40℃ ~+105℃
Humidity: ≤93% at 40℃
 - 4.Packing & storing
Method of packing: plastic bag, inner box, outer box
Storing condition: temperature of -10℃ ~+40℃
below 80% relative humidity
 - 5.Style of installation: crimp cable installation
 - 6.To prevent the pollution of the environment product info
RoHS agreement: In line with the European Union RoHS.

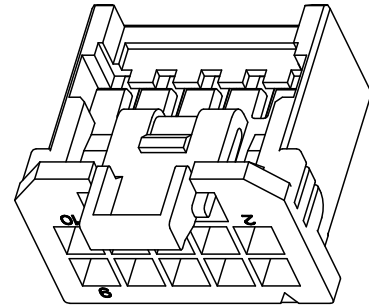

					2.00mm Pitch Dual Row W/B Rcpt Housing with long Lock	SL0.1346.035			
④	1	591979	An.Cheng	2022-12-01		Projection	Rev.	Weight	Scale
Mark	NO.	File NO.	Signature	Date			A1		
DRAW	Tang Jianping 2021-10-19								
CHK	Tim 2022.12.9								
MAN									
STD							xyliu 2022.12.09		
APP	Alan 2022.12.09					All Dimensions in mm		Sheet 1 of 2	
						 SHINNING SHENZHEN SHINNING ELECTRONIC CO.,LTD.			

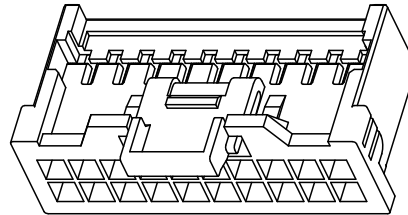

RoHS agreement: In line with the European Union RoHS.

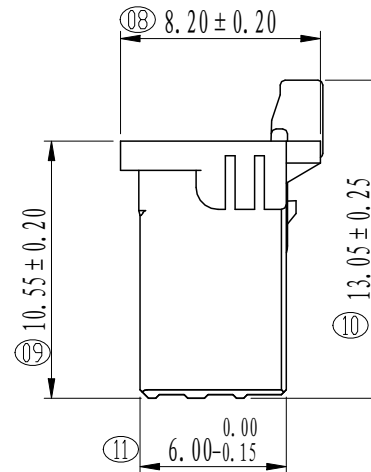

Circuit	Part No.	A	B	C
2X10PIN	13461532	18.00	20.60	22.0
2X11PIN	13462522	20.00	22.60	24.0
2X13PIN	13462526	24.00	26.60	28.0
2X14PIN	13461566	26.00	28.60	30.0

					2.00mm Pitch Dual Row W/B Rcpt Housing with long Lock	SL0.1346.035			
④	1	591979	An.Cheng	2022-10-01		Projection	Rev.	Weight	Scale
Mark	NO.	File NO.	Signature	Date			A1		
DRAW	Tang Jianping 2021-10-19					All Dimensions in mm		Sheet 2 of 2	
CHK	Tim 2022.12.9				134615XX	 SHINNING SHENZHEN SHINNING ELECTRONIC CO.,LTD.			
MAN									
STD									
APP	xlyiu 2022.12.09								
	Alan 2022.12.09								