


N=Number of contacts

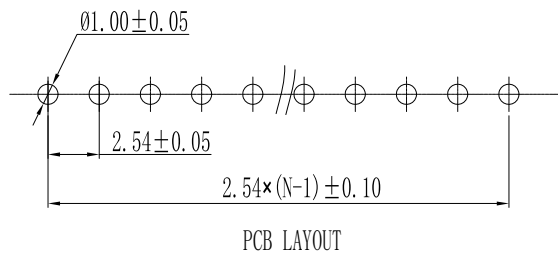

The 7th spec code definition:


Code	A	B	C
1	7.70	1.00	3.30
2	13.4	3.2	8.1
3	7.34	6.00	3.0
4	8.3	3.0	3.0
5	6.64	2.20	3.5
6	11.2	3.2	5.9
8	8.0	6.0	3.0
9	7.90	3.20	2.50
A	8.7	3.2	4.1
B	8.5	3.2	3.2
C	7.72	3.0	3.5
F	13.75	9.33	8.38
G	10.15	2.29	5.84
H	10.84	3.0	5.5
J	8.94	3.2	5.8
K	8.22	3.50	4.20
M	8.30	2.50	3.00
N	8.81	0.99	4.35
P	7.74	3.50	4.60
R	8.00	3.00	3.70
S	8.80	3.20	3.50
Y	10.22	3.20	5.88
L	10.32	3.00	5.00
E	11.40	3.70	7.00

Unless otherwise specified tolerance:

X.	±0.50	X.°	±3°
.X	±0.38	.X°	±2°
.XX	±0.25		

Performance characteristics:

- Main body part material  
Insulator: see spec list  
Contact terminal: brass, 1.27 μm Ni under plated, outer plating see spec list
- Electrical requirements:  
Current rating: 3 A  
Contact resistance: ≤20 mΩ  
Insulation resistance: ≥5000 MΩ  
Withstanding voltage: 1000 Vr.m.s, 1ma, 60s
- Mechanical requirements  
Retention: ≥10 N/pin
- Environment specification  
Working temperature: -55°C~+125°C  
Humidity: ≤93% at 40°C  
Resistance to soldering heat: 245°C±5°C, 10s (PBT insulator)  
260°C±5°C, 10s (PPS, PA6T & LCP insulator)
- Packing & storing  
Method of packing: plastic bag, inner box, outer box  
Storing condition: temperature of -10°C~+40°C  
below 80% relative humidity
- Style of installation: solder pcb installation
- To prevent the pollution of the environment product info  
RoHS agreement: In line with the European Union RoHS.

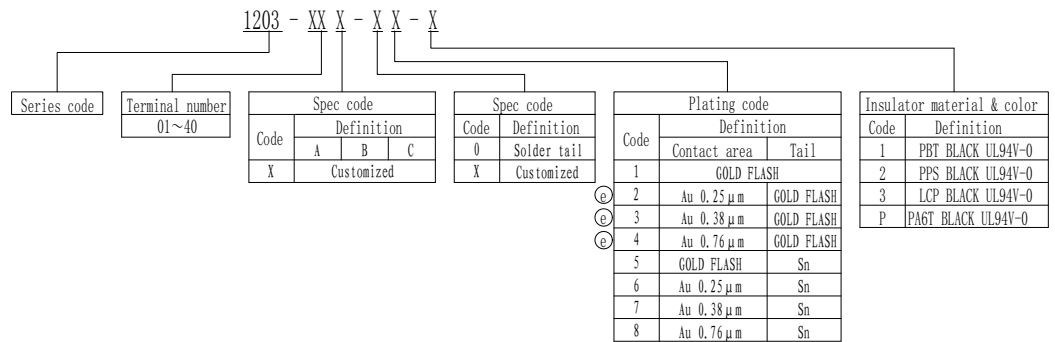

①	1	474710	Jiangbo Liu	2020.08.24
②	3	376814	XiaoWei Pan	2019.03.18
③	2	373701	XiaoWei Pan	2019.03.18
Mark	NO.	File NO.	Signature	Date
DRAW	Tim Lv 2016.05.10			
CHK	Tim 2020.08.31			
MAN				
STD	Juanli lai 2020.09.01			
APP	Alan 2020.09.01			

2.54mm pitch single row terminal strips right angle

1203-XXX-XX-X

SL0. 1203. 100

Projection	Rev.	Weight	Scale
	B6		
All Dimensions in mm		Sheet 1 of 1	
SHINNING SHENZHEN SHINNING ELECTRONIC CO.LTD.			