

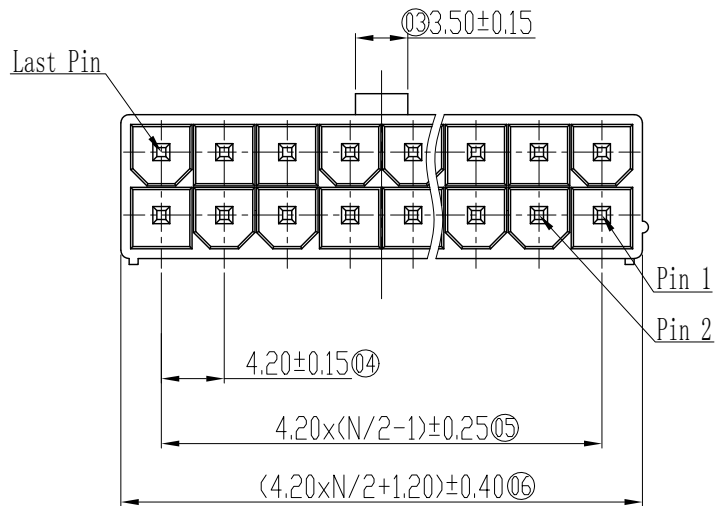
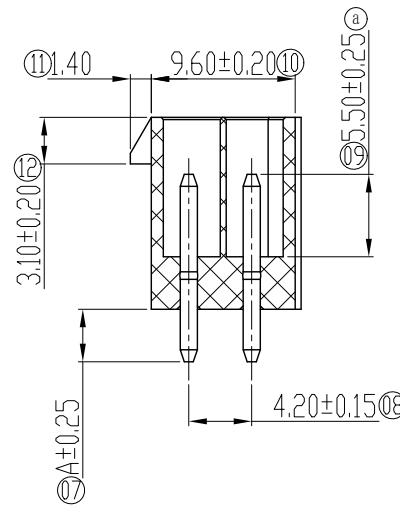


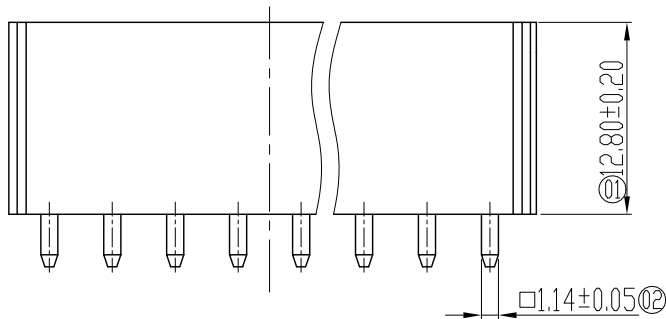

N=Number of Contacts

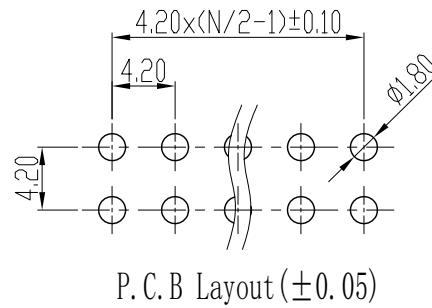

Performance characteristics:

1.Main body part material

Insulator: see part number rule

① Contact terminal: brass, 0.76~2 μm Ni under plated, outer plating see part number rule

2.Electrical requirements:

Current rating: 9 A

Voltage rating: 600 V

Contact resistance: ≤10 mΩ

Insulation resistance: ≥1000 MΩ

Withstanding voltage: 1500 Vr.m.s, 1mA, 60s

3.Mechanical requirements

Retention force: ≥10 N/pin

4.Environment specification

Working temperature: -40℃~105℃

Humidity: ≤93% at 40℃

5.Packing & storing

Method of packing: plastic bag, outer box

Storing condition: temperature of -10℃~+40℃

below 80% relative humidity

6.Style of installation: solder pcb installation

7.To prevent the pollution of the environment product info

RoHS agreement: In line with the european union RoHS.

Series code		Terminal number		Spec code		Spec code		Plating code		Insulator material & color	
1348 - XX 0 - X X - X		02~24		Code Definition		Code Definition		Code Definition		Code Definition	
				0 Dual Row Without pegs		1 Straight Male A=3.5		① B Bright Sn 2~5 μm		D PA66 Nature UL94V-0	
						7 Straight Male A=4.5		X Customized		X Customized	
						X Customized					

					4.20mm Pitch Wafer Dual Row Straight Male	SL0. 1348. 008			
③	3	282566	Change Yu	2018.02.03		Projection	Rev.	Weight	Scale
Mark	NO.	File NO.	Signature	Date			A1		
DRAW		Change Yu 2017.09.07				All Dimensions in  Sheet 1 of 1			
CHK	Tim2018.2.27				1348-XX0-XX-X	 SHINNING SHENZHEN SHINNING ELECTRONIC CO.,LTD.			
MAN									
STD	Spring2018.3.1								
APP	Alan2018.3.1								

Unless otherwise specified tolerance:

X.	±0.50	X.°	±3°
.X	±0.38	.X°	±2°
.XX	±0.25		