

Unless otherwise specified tolerance:

X.	±0.50	X.°	±3°
.X	±0.38	.X°	±2°
.XX	±0.25		

Performance characteristics:

- Main body part material
Insulator: PA66 Black UL94V-0
- Electrical requirements (after assembly) :
Current rating: 6A/pin
Voltage rating: 250 V
Insulation resistance: $\geq 1000 \text{ M}\Omega$
Withstanding voltage: 1500 Vr.m.s, 1mA, 60s
- Mechanical requirements
Contact Retention Force: $\geq 24.5 \text{ N/PIN}$
- Environment specification
Working temperature: $-40^\circ\text{C} \sim +105^\circ\text{C}$
- Packing & storing
Method of packing: Plastic bag, outer box
Storing condition: Temperature of $-10^\circ\text{C} \sim +40^\circ\text{C}$
below 80% relative humidity
- Style of installation: Applicable for crimp cable installation
- To prevent the pollution of the environment product info
RoHS agreement: In line with the european union RoHS.

Size table: ③

P/N	PIN NO.	A	B	C
13491201	2X01	3.86	N/A	2.40
13491202	2X02	6.85	3.00	5.40
13491203	2X03	9.85	6.00	8.40
13491204	2X04	12.85	9.00	11.40
13491205	2X05	15.85	12.00	14.40
13491206	2X06	18.85	15.00	17.40
13491207	2X07	21.85	18.00	20.40
13491208	2X08	24.85	21.00	23.40
13491209	2X09	27.85	24.00	26.40
13491210	2X10	30.85	27.00	29.40
13491211	2X11	33.85	30.00	32.40
13491212	2X12	36.85	33.00	35.40

④	1	591179	Change Yu	2022.11.21
③	4	315814	Change Yu	2018.06.28
②	1	266528	Change Yu	2017.12.08
Mark	NO.	File NO.	Signature	Date
DRAW	Armin.Qiu 2017.01.04			
CHK				
MAN				
STD				
APP				

Micro-Fit (3.0mm Pitch)
female housing













134912XX

SLO. 1349. 003

Projection	Rev.	Weight	Scale
	A4		

All Dimensions in mm Sheet 1 of 2



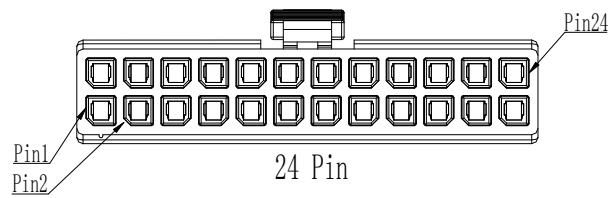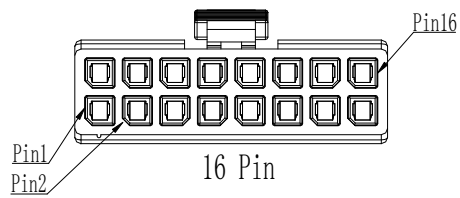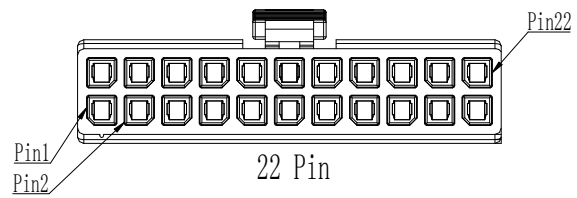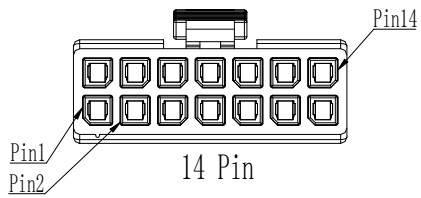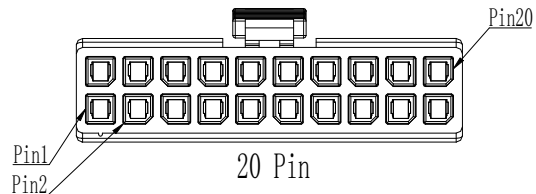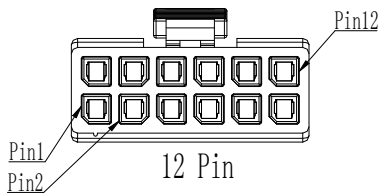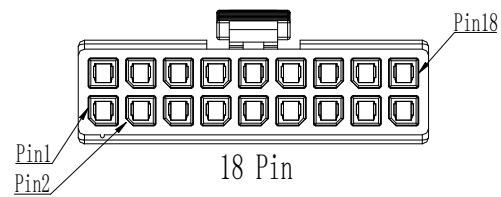

Unless otherwise specified tolerance:

X.	±0.50	X.°	±3°
.X	±0.38	.X°	±2°
.XX	±0.25		

④	1	591179	Change Yu	2022.11.21
③	4	315814	Change Yu	2018.06.28
②	1	266528	Change Yu	2017.12.08
Mark	NO.	File NO.	Signature	Date
DRAW			Armin.Qiu	2017.01.04
CHK				
MAN				
STD				
APP				

Micro-Fit (3.0mm Pitch)
female housing

134912XX

SL0.1349.003

Projection	Rev.	Weight	Scale
	A4		

All Dimensions in mm

Sheet 2 of 2

SHINNING SHENZHEN SHINNING ELECTRONIC CO.,LTD.