



Section A-A



Section B-B

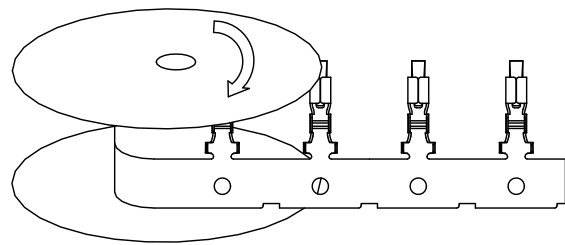

Packing Drawing

Unless otherwise specified tolerance:

X.	±0.50	X.°	±3°
.X	±0.38	.X°	±2°
.XX	±0.25		

Performance characteristics:

1. Main body part material  
Contact terminal: Copper alloy, 1.27μm Min. Ni under plated, outer plating bright Sn3~5μm
2. Electrical requirements:  
Current rating: 3 A  
Voltage rating: 250 V  
Contact resistance: ≤20 mΩ
3. Mechanical requirements  
Wire gauge: AWG22~28
4. Environment specification  
Working temperature: -40°C~+105°C
5. Packing & storing  
Number of packing: 5000pcs/reel, outer box  
Method of packing: Paper reel  
Storing condition: temperature of -10°C~+40°C below 80% relative humidity
6. Style of installation: Applicable for crimp cable installation
7. To prevent the pollution of the environment product info  
RoHS agreement: In line with the European Union RoHS.

					2.50mm Wafer Female Terminal		SLO. 1343. 042			
Mark	NO.	File NO.	Signature	Date			Projection	Rev.	Weight	Scale
DRAW			Change Yu	2019.08.26				A0		
CHK			Tim	2020.04.21			All Dimensions in mm			
MAN							Sheet 1 of 1			
STD			Juanli lia	2020.04.22	13433035					
APP			Alan	2020.04.22			SHINNING SHENZHEN SHINNING ELECTRONIC CO. LTD.			