


- Performance characteristics:
- Main body part material
Contact terminal: phosphor bronze, 1.27μm Ni under plated, outer plating matte Sn 3μm min.
 - Electrical requirements:
Current rating: 4.5 A
Voltage rating: 250 V
Contact resistance: ≤10 mΩ
 - Mechanical requirements
Insertion force: ≤5 N/pin (Use 0.64mm square pin)
Extraction force: ≥1 N/pin (Use 0.64mm square pin)
Wire gauge: AWG20~24
 - Environment specification
Working temperature: -40°C ~ +105°C
 - Packing & storing
Storing condition: temperature of -10°C ~ +40°C below 80% relative humidity
 - Style of installation: Applicable for crimp cable installation
 - To prevent the pollution of the environment product info
RoHS agreement: In line with the European Union RoHS.

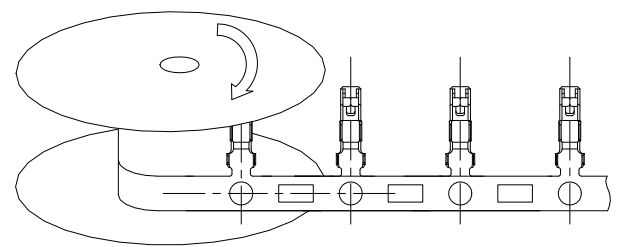

Packing draw

Unless otherwise specified tolerance:

X.	±0.50	X.°	±3°
.X	±0.38	.X°	±2°
.XX	±0.25		

Mark	NO.	File NO.	Signature	Date
①	2	445926	ZhaoLin	2020.04.01
②	4	358816	ZhaoLin	2018.12.22
DRAW	ZhaoLin 2018.07.31			
CHK	Tim 2020.07.29			
MAN	Juanli lai 2020.08.03			
STD	Alan 2020.08.03			
APP				

2.54mm Wafer female terminal
(HUAWEI)

12363022

SLO. 1236.013			
Projection	Rev.	Weight	Scale
	A2		
All Dimensions in mm		Sheet 1 of 1	
SHINNING SHENZHEN SHINNING ELECTRONIC CO.,LTD.			