


Part No.	Circuit	A	B	C	D	LOGO Mark
13431502	2	7.30	5.60	2.50	1.2	 SHINNING
13431503	3	9.80	8.10	5.00	2.2	
13431504	4	12.30	10.60	7.50	2.2	
13431505	5	14.80	13.10	10.00	2.2	
13431506	6	17.30	15.60	12.50	2.2	
13431507	7	19.80	18.10	15.00	2.2	
13431508	8	22.30	20.60	17.50	2.2	
13431509	9	24.80	23.10	20.00	2.2	
13431510	10	27.30	25.60	22.50	2.2	
13431511	11	29.80	28.10	25.00	2.2	
13431512	12	32.30	30.60	27.50	2.2	
13431513	13	34.80	33.10	30.00	2.2	
13431514	14	37.30	35.60	32.50	2.2	
13431515	15	39.80	38.10	35.00	2.2	

Performance characteristics:

- Main body part material
Insulator: PA66 Nature UL94V-0
- Electrical requirements:
Current rating: 3A
Voltage rating: 250V
Insulation resistance: $\geq 1000 \text{ M}\Omega$
Withstanding voltage: 1000 Vr.m.s, 1mA, 60s
- Environment specification
Working temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
- Packing & storing
Method of packing: Plastic bag, inner box, outer box
Storing condition: Temperature of $-10^{\circ}\text{C} \sim +40^{\circ}\text{C}$
below 80% relative humidity
- Style of installation: crimp cable installation
- To prevent the pollution of the environment product info
RoHS agreement: In line with the European Union RoHS.

Unless otherwise specified tolerance:

X.	± 0.50	X.°	$\pm 3^{\circ}$
.X	± 0.38	.X°	$\pm 2^{\circ}$
.XX	± 0.25		

Mark	NO.	File NO.	Signature	Date
DRAW			James Zhang	2021.10.10
CHK			Tim	2021.11.23
MAN				
STD			Juanli lai	2021.11.24
APP			Alan	2021.11.24

2.50 Pitch wafer
female housing

13431502-13431515

SLO. 1343.062





Projection	Rev.	Weight	Scale
	A0		
All Dimensions in mm		Sheet 1 of 2	
 SHINNING SHENZHEN SHINNING ELECTRONIC CO.,LTD.			


Diagram of All Circuit




2PIN




7PIN

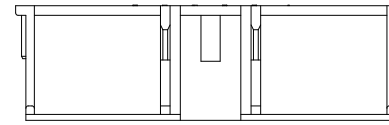


12PIN




3PIN




8PIN




13PIN




4PIN




9PIN




14PIN




5PIN




10PIN

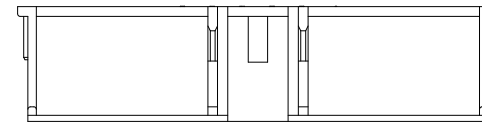

15PIN



6PIN

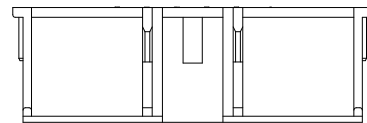

11PIN

Unless otherwise specified tolerance:

X.	±0.50	X.°	±3°
.X	±0.38	.X°	±2°
.XX	±0.25		

Mark	NO.	File NO.	Signature	Date
DRAW			James Zhang	2021.10.10
CHK			Tim	2021.11.23
MAN				
STD		Juanli lai	2021.11.24	
APP		Alan	2021.11.24	

2.50 Pitch wafer
female housing

13431502-13431515

SL0.1343.062

Projection	Rev.	Weight	Scale
	A0		
All Dimensions in mm		Sheet 2 of 2	
SHINNING SHENZHEN SHINNING ELECTRONIC CO.,LTD.			